




CS - CLAMSHELL

- 19 standard models from 2"-60" cutting range
- Split-Frame design for easy mounting
- Pneumatic, electric, and hydraulic drive options available
- Ideal for beveling, facing or counterboring pipe or tubing
- Wide range of accessories to meet most applications
- Larger and customizable sizes available



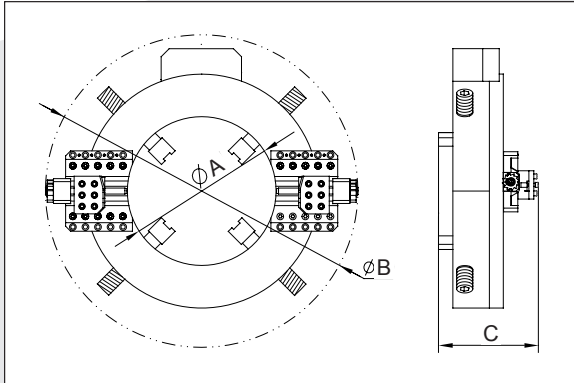

MODEL	Unit of Measure	Working Range	A	B	C	MACHINE WEIGHT	MACHINE WEIGHT	SHIPPING WEIGHT	PACKAGE SIZE
CS6	Std. - in.	2"-6"	7.3	20.2	7.6	41.5	41.5kg	67.5kg	28.3*25.2*11.4
	Metric - mm	50-168	185	512	192	91.3	91.3lbs	148.5lbs	720*640*290
CS8	Std. - in.	2"-8"	9.3	22.2	7.6	42.5	42.5kg	75.5kg	27.9*26.8*11.4
	Metric - mm	50-230	236	564	192	93.5	93.5lbs	166.1lbs	710*680*290
CS10	Std. - in.	4"-10"	11.1	24.1	7.6	44.5	44.5kg	79.5kg	27.9*26.9*11.1
	Metric - mm	114-275	283	612	192	97.9	97.9lbs	174.9lbs	710*685*280
CS12	Std. - in.	6"-12"	13.1	26.2	7.6	53	53kg	88kg	31.5*28.9*10.8
	Metric - mm	168-325	334	665	192	116.6	116.6lbs	193.6lbs	800*735*275
CS14	Std. - in.	8"-14"	15.2	28.3	7.6	56	56kg	94kg	33.1*11.1*11.2
	Metric - mm	219-377	386	719	192	123.2	123.2lbs	206.8lbs	840*280*285
CS16	Std. - in.	10"-16"	17.2	30.6	7.7	60	60kg	100kg	35.1*28.1*10.8
	Metric - mm	273-426	438	776	195	132	132lbs	220lbs	890*715*275
CS18	Std. - in.	12"-18"	18.5	31.8	7.7	65.5	65.5kg	106.5kg	34.6*29.1*11.4
	Metric - mm	300-457	469	807	195	144.1	144.1lbs	234.3lbs	880*740*290
CS20	Std. - in.	14"-20"	20.4	33.9	7.7	77	77kg	122kg	38.9*32.3*12.6
	Metric - mm	355-508	519	862	195	169.4	169.4lbs	268.4lbs	990*820*320
CS22	Std. - in.	16"-22"	22.4	35.8	7.7	79	79kg	127kg	38.9*36.2*13.4
	Metric - mm	400-560	570	910	195	173.8	172.8lbs	279.4lbs	990*920*340
CS24	Std. - in.	18"-24"	24.3	37.8	7.7	85	85kg	134kg	42.5*35.4*13.8
	Metric - mm	457-610	618	960	195	187	187lbs	294.8lbs	1080*900*350
CS26	Std. - in.	20"-26"	26.4	40.2	7.7	96	96kg	150kg	38.9*33.9*13.4
	Metric - mm	508-660	670	1020	195	211.2	211.2lbs	330lbs	990*990*340
CS28	Std. - in.	22"-28"	28.3	42.7	7.8	114	114kg	169kg	40.5*40.5*13.4
	Metric - mm	550-715	719	1084	198	250.8	250.8lbs	371.8lbs	1030*1030*340
CS30	Std. - in.	24"-30"	30.3	44.6	7.8	116	116kg	172kg	42.9*42.9*13.4
	Metric - mm	600-762	770	1134	198	255.2	255.2lbs	378.4lbs	1090*1090*340
CS32	Std. - in.	26"-32"	32.7	47.0	8.1	120.5	120.5kg	181.5kg	44.8*44.8*13.4
	Metric - mm	660-813	830	1194	207	265.1	265.1lbs	399.3lbs	1140*1140*340
CS36	Std. - in.	30"-36"	36.4	51.0	8.4	144.5	144.5kg	209.5kg	49.2*49.2*14.9
	Metric - mm	762-914	924	1296	214	317.9	317.9lbs	460.9lbs	1250*1250*380
CS42	Std. - in.	36"-42"	42.4	57.8	8.5	197.5	197.5kg	281.5kg	56.3*31.9*14.9 *2
	Metric - mm	914-1066	1077	1468	216	434.5	434.5lbs	619.3lbs	1430*810*380 *2
CS48	Std. - in.	42"-48"	49.1	64.8	8.5	244	244kg	347kg	64.5*35.8*14.9 *2
	Metric - mm	1066-1230	1248	1646	216	536.8	536.8lbs	763.4lbs	1640*910*380 *2